
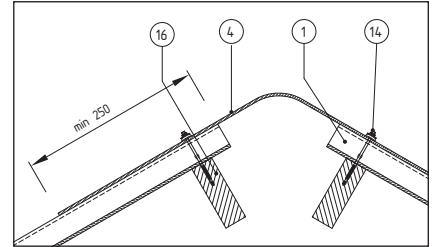


V-nokstuk niet-profielgebonden

| Vleugel lengte | α | Totale breedte mm | Nuttige breedte mm |
|-------------------|----------|----------------------|-----------------------|
| 300 | 15° | 1200 | 1100 |
| 300 | 20° | 1200 | 1100 |
| 300 | 25° | 1200 | 1100 |
| 300 | 30° | 1200 | 1100 |
| 300 | 45° | 1200 | 1100 |
| <hr/> | | | |
| 500 | 20° | 1200 | 1100 |
| 500 | 25° | 1200 | 1100 |
| 500 | 30° | 1200 | 1100 |
| <hr/> | | | |
| 600 | 20° | 1200 | 1100 |
| 600 | 25° | 1200 | 1100 |
| 600 | 30° | 1200 | 1100 |

V-nokstuk

Toepassen t.b.v. ventilerende nokconstructies en hoekkepers. Minimale overlap bij nok 250 mm.

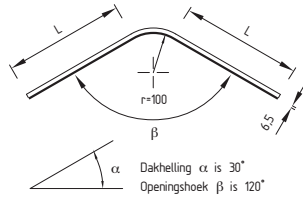

Nok zadeldak met V-nok

- 1 Ecolor en Ecolor Extra golfplaat
- 4 V-nokstuk
- 14 Zelfborende bevestigiger
- 16 Houten gording